


单直孔棒材

Rods with Central Coolant Hole

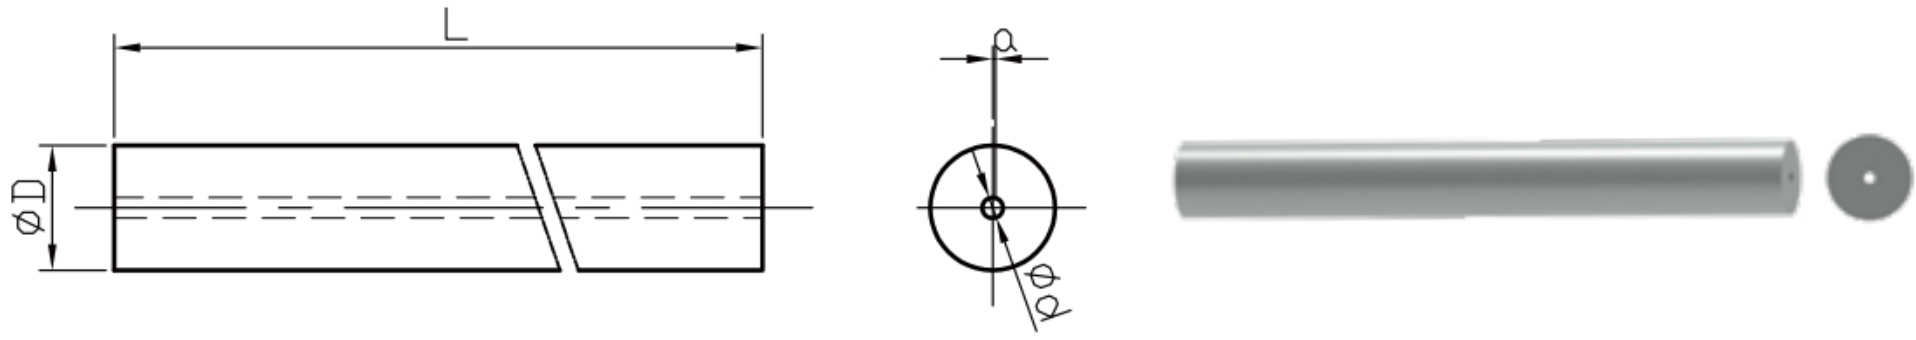

长度 L=330mm (公差 Tol.0/+5) 单位Unit: mm

ØD	直径 Diameter	内孔径 Hole Diameter		孔中心偏离 Centre Offset	T10		T10F		T12UF	
	Tol. 0f raw	Ød	Tol.	a	raw	h6	raw	h6	raw	h6
3	+0.30/+0.50	0.50	±0.10	0.10	◇	◇	◇	◇	◇	◇
4	+0.30/+0.50	0.80	±0.10	0.10	○	◇	○	◇	◇	◇
5	+0.30/+0.50	0.80	±0.10	0.13	◇	◇	◇	◇	◇	◇
6	+0.30/+0.50	1.00	±0.15	0.15	○	◇	○	◇	◇	◇
7	+0.30/+0.60	1.00	±0.15	0.15	◇	◇	◇	◇	◇	◇
8	+0.30/+0.60	1.00	±0.15	0.15	○	◇	○	◇	◇	◇
9	+0.30/+0.60	1.40	±0.15	0.20	◇	◇	◇	◇	◇	◇
10	+0.30/+0.60	1.40	±0.15	0.20	○	◇	○	◇	◇	◇
11	+0.30/+0.60	1.40	±0.15	0.28	◇	◇	◇	◇	◇	◇
12	+0.30/+0.60	1.75	±0.15	0.30	○	◇	○	◇	◇	◇
13	+0.30/+0.70	1.75	±0.15	0.34	◇	◇	◇	◇	◇	◇
14	+0.30/+0.70	1.75	±0.15	0.37	○	◇	○	◇	◇	◇
15	+0.30/+0.70	2.00	±0.20	0.40	◇	◇	◇	◇	◇	◇
16	+0.30/+0.70	2.00	±0.20	0.40	○	◇	○	◇	◇	◇
17	+0.30/+0.80	2.00	±0.20	0.47	◇	◇	◇	◇	◇	◇
18	+0.30/+0.80	2.00	±0.20	0.50	◇	◇	◇	◇	◇	◇
19	+0.30/+0.80	2.00	±0.20	0.50	◇	◇	◇	◇	◇	◇
20	+0.30/+0.80	2.50	±0.25	0.50	◇	◇	◇	◇	◇	◇
21	+0.30/+0.80	2.50	±0.25	0.50	◇	◇	◇	◇	◇	◇
22	+0.30/+0.80	2.50	±0.25	0.50	◇	◇	◇	◇	◇	◇
23	+0.30/+0.80	2.50	±0.25	0.50	◇	◇	◇	◇	◇	◇
24	+0.30/+0.80	3.00	±0.25	0.50	◇	◇	◇	◇	◇	◇
25	+0.30/+0.80	3.00	±0.25	0.50	◇	◇	◇	◇	◇	◇
26	+0.30/+0.80	3.00	±0.25	0.50	◇	◇	◇	◇	◇	◇
27	+0.30/+0.80	3.00	±0.25	0.50	◇	◇	◇	◇	◇	◇
28	+0.30/+0.80	3.00	±0.25	0.50	◇	◇	◇	◇	◇	◇
29	+0.30/+0.80	3.00	±0.25	0.50	◇	◇	◇	◇	◇	◇
30	+0.30/+0.80	3.00	±0.25	0.50	◇	◇	◇	◇	◇	◇