


40°双螺旋孔棒材

Rods with 2 Helical Coolant Holes (40°)

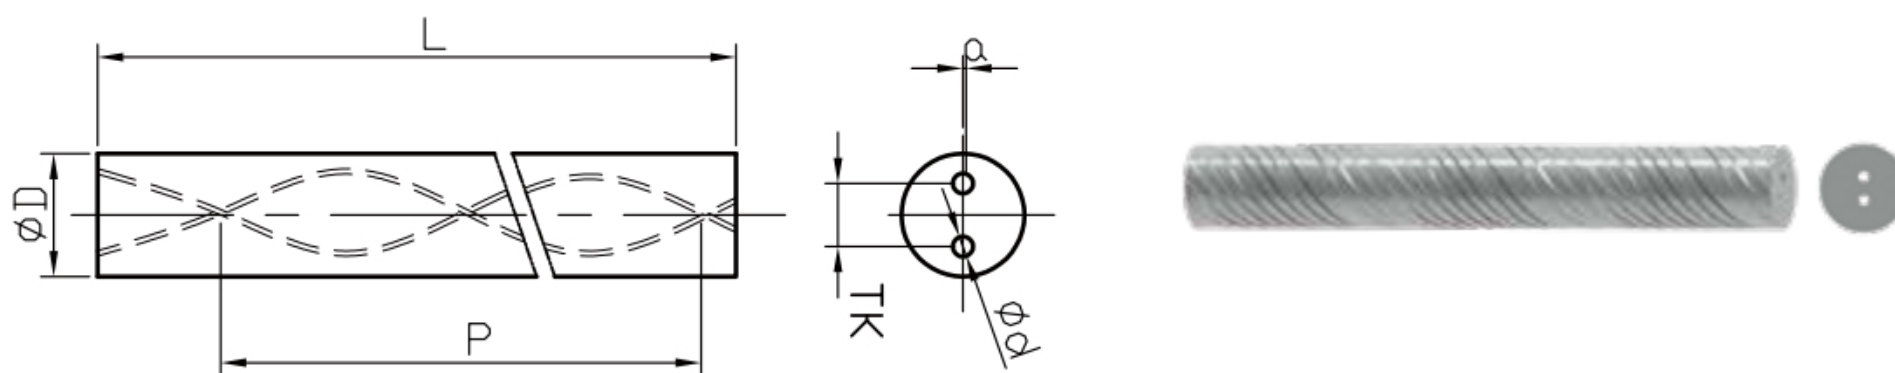

长度 L=330mm (公差 Tol.0/+5) 单位Unit: mm

直径 Diameter		内孔径 Hole Diameter		孔间距 Bolt Circle		螺距(±0.5°) Pitch			孔中心偏离 Centre Offset	T10		T10F	
ØD	Tol. of raw	Ød	Tol.	TK	Tol.	P	公差Tol.		a	raw	h6	raw	h6
6	+1.1/+1.5	0.50	±0.10	2.20	0/-0.4	22.46	-0.39	+0.40	0.15	◇	◇	◇	◇
7	+1.1/+1.5	0.65	±0.15	2.40	0/-0.6	26.21	-0.46	+0.47	0.15	◇	◇	◇	◇
8	+1.1/+1.5	0.65	±0.15	2.70	0/-0.6	29.95	-0.53	+0.54	0.15	◇	◇	◇	◇
9	+1.1/+1.5	0.75	±0.15	3.20	0/-0.8	33.70	-0.59	+0.60	0.20	◇	◇	◇	◇
10	+1.1/+1.5	0.80	±0.15	3.50	0/-0.8	37.44	-0.66	+0.67	0.20	◇	◇	◇	◇
11	+1.1/+1.5	0.80	±0.15	3.70	0/-0.8	41.18	-0.72	+0.74	0.30	◇	◇	◇	◇
12	+1.1/+1.5	0.90	±0.15	4.20	0/-0.8	44.93	-0.79	+0.80	0.30	◇	◇	◇	◇
13	+1.1/+1.5	0.90	±0.15	4.40	0/-0.8	48.67	-0.85	+0.87	0.37	◇	◇	◇	◇
14	+1.1/+1.5	1.00	±0.20	4.70	0/-0.8	52.42	-0.92	+0.94	0.40	◇	◇	◇	◇
15	+1.1/+1.5	1.10	±0.20	5.10	0/-0.8	56.16	-0.99	+1.01	0.40	◇	◇	◇	◇
16	+1.1/+1.5	1.20	±0.20	5.50	0/-0.8	59.90	-1.05	+1.07	0.40	◇	◇	◇	◇
17	+1.1/+1.5	1.20	±0.20	5.90	0/-0.8	63.65	-1.12	+1.14	0.45	◇	◇	◇	◇
18	+1.1/+1.5	1.40	±0.25	6.30	0/-0.8	67.39	-1.18	+1.21	0.50	◇	◇	◇	◇
19	+1.1/+1.5	1.40	±0.25	6.70	0/-0.8	71.14	-1.25	+1.27	0.50	◇	◇	◇	◇
20	+1.1/+1.5	1.50	±0.25	7.10	0/-1.0	74.88	-1.31	+1.34	0.50	◇	◇	◇	◇

有库存stock item ○ 可定制Customizable ◇