


30°三螺旋孔棒材

Rods with 3 Helical Coolant Holes (30°)

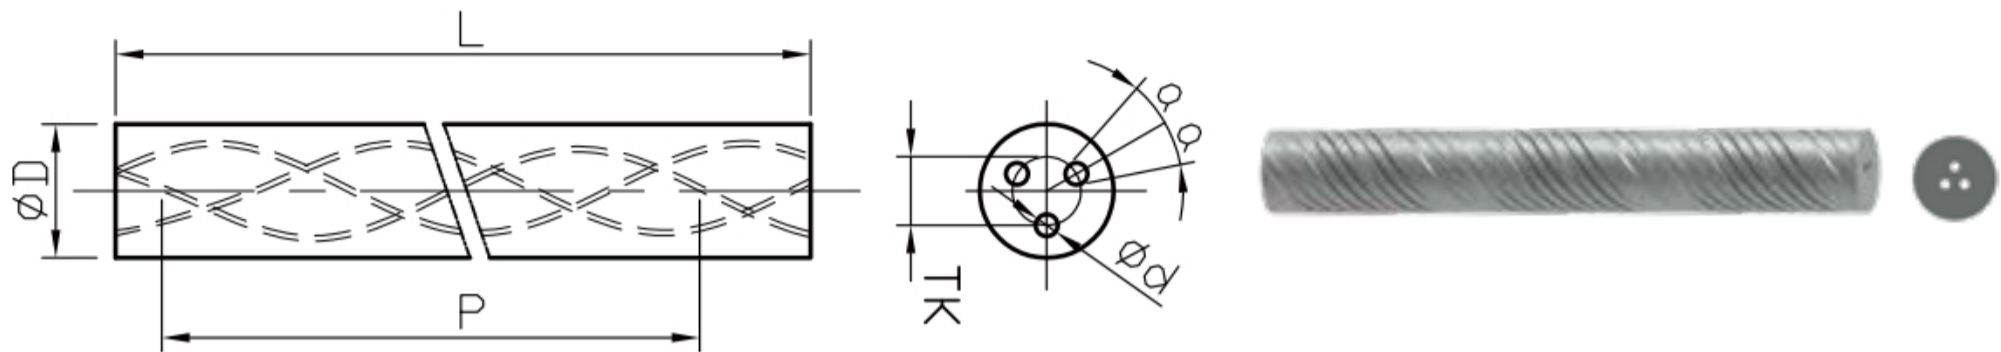

长度 L=330mm (公差 Tol.0/+5) 单位Unit: mm

直径 Diameter		内孔径 Hole Diameter		孔间距 Bolt Circle		螺距(±0.5°) Pitch		孔中心偏离 Centre Offset	T10		T10F	
ØD	Tol.0f raw	Ød	Tol.	TK	Tol.	P	公差Tol.	a	raw	h6	raw	h6
6	+0.60/+1.00	0.70	±0.10	2.75	0/-0.4	32.65	-0.65 +0.67	±4°	◇	◇	◇	◇
6	+0.60/+1.00	0.50	±0.10	2.90	0/-0.4	32.65	-0.65 +0.67	±4°	◇	◇	◇	◇
8	+0.70/+1.10	1.00	±0.15	4.00	0/-0.4	43.53	-0.86 +0.89	±4°	◇	◇	◇	◇
8	+0.70/+1.10	0.70	±0.10	4.00	0/-0.4	43.53	-0.86 +0.89	±4°	◇	◇	◇	◇
10	+0.70/+1.10	1.40	±0.15	5.00	0/-0.6	54.41	-1.08 +1.11	±4°	◇	◇	◇	◇
10	+0.70/+1.10	0.85	±0.10	5.10	0/-0.6	54.41	-1.08 +1.11	±4°	◇	◇	◇	◇
12	+0.70/+1.10	1.40	±0.15	6.00	0/-0.6	65.30	-1.30 +1.34	±4°	◇	◇	◇	◇
12	+0.70/+1.10	1.10	±0.15	6.30	0/-0.8	65.30	-1.30 +1.34	±4°	◇	◇	◇	◇
14	+0.70/+1.10	1.75	±0.20	7.00	0/-0.8	76.18	-1.51 +1.56	±4°	◇	◇	◇	◇
14	+0.70/+1.10	1.40	±0.15	7.30	0/-0.8	76.18	-1.51 +1.56	±4°	◇	◇	◇	◇
16	+0.70/+1.10	1.75	±0.20	8.00	0/-0.8	87.06	-1.73 +1.78	±4°	◇	◇	◇	◇
16	+0.70/+1.10	1.60	±0.15	8.30	0/-0.8	87.06	-1.73 +1.78	±4°	◇	◇	◇	◇
18	+0.70/+1.10	2.00	±0.25	9.55	0/-0.8	97.95	-1.94 +2.00	±4°	◇	◇	◇	◇
18	+0.70/+1.10	1.70	±0.15	9.50	0/-0.8	97.95	-1.94 +2.00	±4°	◇	◇	◇	◇
20	+0.70/+1.10	2.00	±0.25	10.00	0/-1	108.83	-2.16 +2.23	±4°	◇	◇	◇	◇
20	+0.70/+1.10	1.90	±0.20	10.20	0/-1	108.83	-2.16 +2.23	±4°	◇	◇	◇	◇

有库存stock item ○ 可定制Customizable ◇